



STEAM

Gal

2,45<sup>kW</sup>



STEAM CLEANER

Boiler	Stainless-steel AISI 304 with interchangeable heating element		
Body	ABS VO - Varnished steel P04		
Power supply	V - Hz	1~ 230 - 50/60	
Boiler output	kW/h	2,4	
Maximum output	kW/h	2,45	
Boiler volume	l	1,5	
Operating pressure	bar	6	8
Water tank	l	3	
Steam production	g/min	64	
	Kg/h	3,8	
Steam temperature	° C	165	174

VARIOUS

Weight	Kg	14	
Cable	m	5	
Dimensions (generator)	cm	H.33 x L.32 x W. 41	
Dimensions (pallet)	cm	53 x 40 x 52	
Pallet/unit	pz	24	



Chattanooga

Technical features



Operating pressure  
8 bar



Operating pressure  
6bar



Water tank



Automatic water refilling



Overheated water injection



Control panel



Boiler maintenance signal

Steam cleaner with ABS and varnished-steel body and stainless-steel boiler, designed for professional use:

- Able to deliver dry saturated steam at 165°C or 174°C.
- Equipped with an overheated water injection system (available only for the 8-bar model).
- The ergonomic structure, the fully electric operation and the compact size allows its to usage in any environment.
- All steam cleaner functions can be managed on the electronic control panel.
- Equipped with cable holder and anti-scratch 360° swivel front wheels.

SCAN ME!



**Features**

Water tank - 3 l



Optional  
Trolley ARENA PLUS

Handle

Cable holder



Control panel

System ON




Electric plug  
SHUKO 5m



Steam outlet

Plastic wheels  
360°

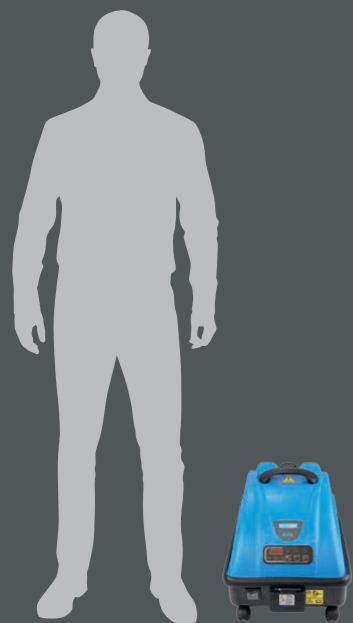

Dimensioni

**CONTROL PANEL**

- Display to visualize temperature and pressure levels, working hours and boiler cleaning signal
- Buttons and indicators for the complete control of the parameters of the steam cleaner



**Optional accessories**

Gal can be used with the following accessories:

**JULY 6 bar  
Steam accessories**




**STEAM MOP 6 bar  
Steam accessories**





HO.RE.CA

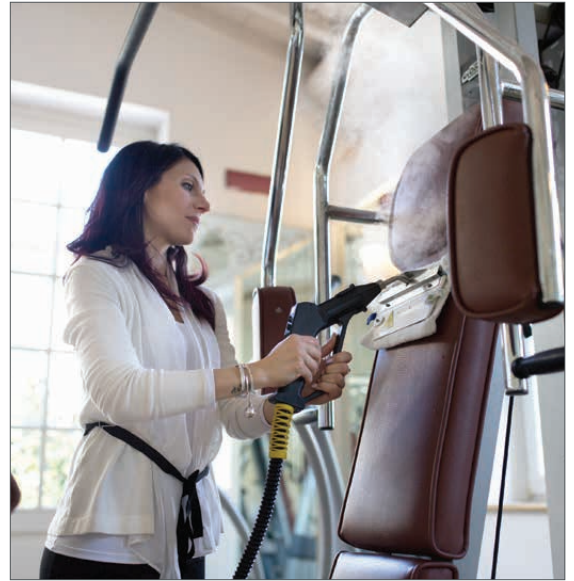

HOUSEHOLD



HEALTH CARE

